

EXCLUSIVELY FROM




THE SWITCH A-ARM

FULLY AUTOMATIC: can be operated from the forklift with wireless remote

SIMPLE & SAFE: no need for the operator to attach and cut the film

ALL ELECTRIC: no air requirement or noisy compressors

AFFORDABLE: fits any budget, not much more than a semi-automatic

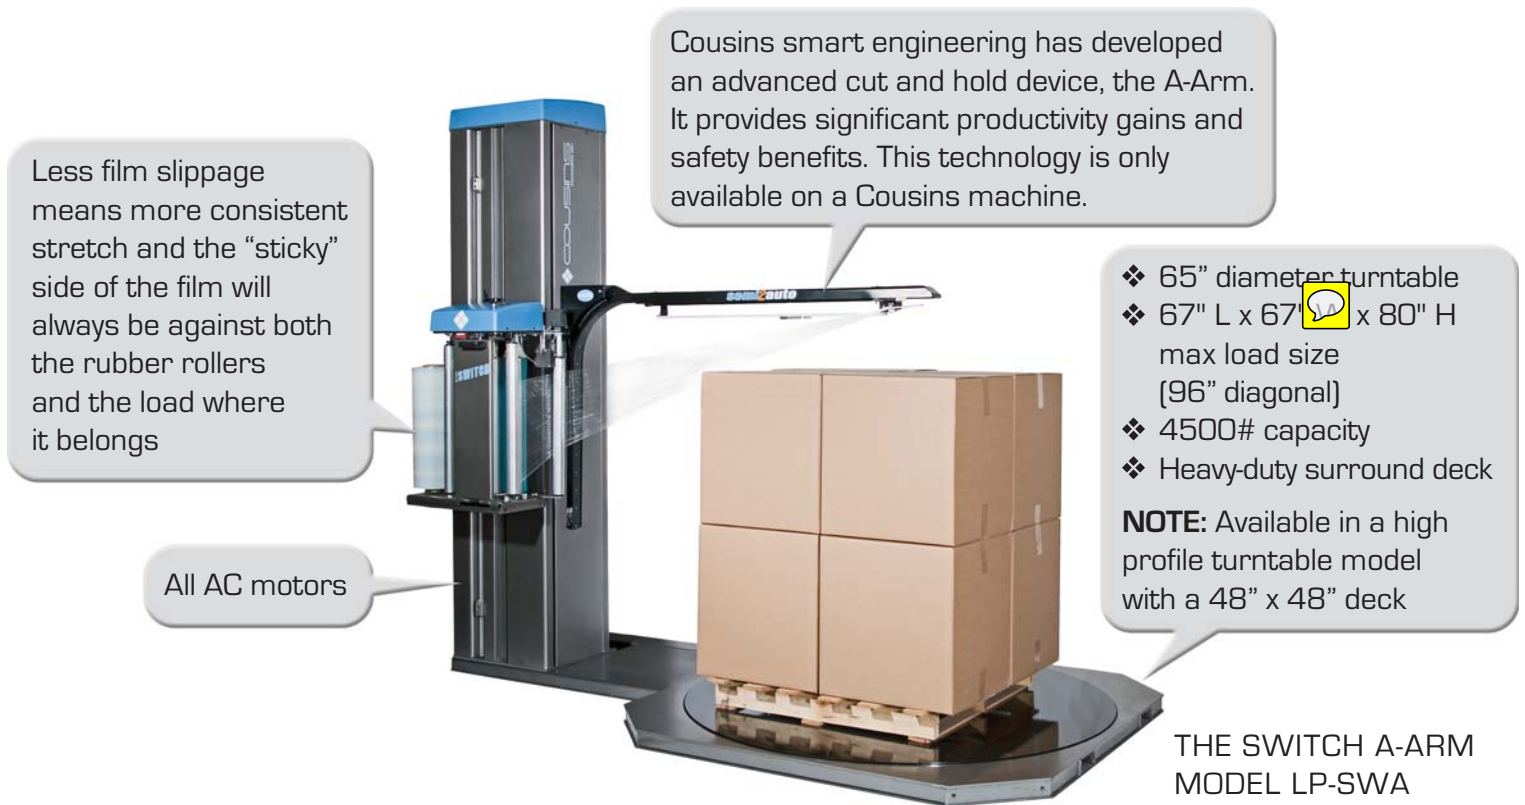

The A-Arm technology is available in a fully automated conveyORIZED system that will reduce labor costs at a very affordable price.



MODEL 3300-A



THE SWITCH A-ARM DESIGN FEATURES/SPECIFICATIONS

CONTROLS:

- ❖ **3 machines in 1** easy selection for Automatic / semi-automatic / top banding modes
- ❖ LCD Operator Interface with Diagnostics
- ❖ Cycle Pause & Reinforce Wrap
- ❖ Separate UP/DOWN Spiral Speed Controls
- ❖ 3 Separate Wrap Programs
- ❖ Selectable Reduced Film Tension parameters for wrapping top and/or bottom of light loads
- ❖ Emergency Stop button
- ❖ Wireless Remote Cycle Start/Stop
- ❖ 115 Volts 1 Phase 60 Hz 15 Amps
- ❖ **3 Year Warranty on Components**



FILM CARRIAGE:

- ❖ Super Rapid Thread II™ 20" capacity pre-stretch film carriage
- ❖ Safety Door with auto power cut-off switch
- ❖ Special Film Threading Device - Uniquely orientates the sticky side of the film against the pre-stretch rollers and the inside on the load.
- ❖ ½ HP AC variable speed motor
- ❖ 33% to 313% fixed stretch capability
- ❖ Carriage Descent Safety Shut-Off Device
- ❖ Superior film-to-roller contact area
- ❖ **Lifetime warranty on pre-stretch rollers**



TOWER DESIGN:

- ❖ Fully Enclosed & Guarded Motors
- ❖ No Exposed Cables
- ❖ Heavy Duty Formed/Structural Steel
- ❖ Electro-static powder coated paint finish
- ❖ **5 Year Warranty on Steel Fabrications**

LOW PROFILE TURNTABLE:

- ❖ 4500# Capacity
- ❖ 1 - 12 RPM with Soft Start Acceleration
- ❖ ½ HP AC Variable Speed Drive
- ❖ Heavy Duty Surround Deck
- ❖ Forklift Tubes - Front and Rear
- ❖ Maintenance Free 48 Support Wheels
- ❖ 65" diameter
- ❖ Optional loading ramp 60" long x 48" wide complete with 10" level porch area available

