




# THE SWITCH

FUTURE AUTOMATION: the only machine available that can be easily converted to a **labor saving** fully automatic on site at a later date MORE FOR THE MONEY: standard machine wraps heavier, larger loads USES LESS FILM: advanced film carriage reduces slippage SAFE & SIMPLE: more superior safety features

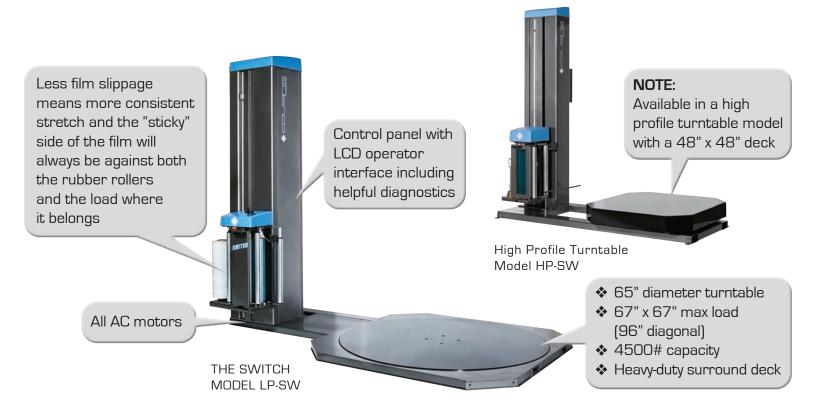

Can easily be converted to a fully automatic on site at a later date by installing the unique A-Arm

The Switch with A-Arm installed



## THE SWITCH DESIGN FEATURES/SPECIFICATIONS

#### **CONTROLS**:

- LCD Operator Interface with Diagnostics
- Cycle Pause & Reinforce Wrap
- Separate UP/DOWN Spiral Speed Controls
- NEMA 12
- ✤ 3 Separate Wrap Programs
- Selectable Reduced Film Tension parameters for wrapping top and/or bottom of light loads
- Emergency Stop button
- 115 Volts 1 Phase 60 Hz 15 Amps
- 3 Year Warranty on Components

### FILM CARRIAGE:

- ♦ Super Rapid Thread II ™ 20" capacity pre-stretch film carriage
- Special Film Threading Device –
  Uniquely orientates the sticky side of the film against the pre-stretch rollers and the inside on the load.
- ✤ 1/2 HP AC variable speed motor
- ✤ 33% to 313% fixed stretch capability
- Carriage Descent Safety Shut-Off Device
- Superior film-to-roller contact area
- Lifetime warranty on pre-stretch rollers

#### **TOWER DESIGN:**

- Fully Enclosed & Guarded Motors
- No Exposed Cables
- Heavy Duty Formed/Structural Steel
- Electro-static powder coated paint finish
- 5 Year Warranty on Steel Fabrications

#### LOW PROFILE TURNTABLE:

- ♦ 65" diameter
- ♦ 4500# Capacity
- 1 12 RPM with Soft Start Acceleration
- ✤ ½ HP AC Variable Speed Drive
- Heavy Duty Surround Deck
- Forklift Tubes Front and Rear
- ✤ Maintenance Free 54 Support Wheels
- Optional loading ramp 60" long x 48" wide complete with 10" level porch area available





